



Figure similar

CONTACTOR, 90KW/400V/AC-3, AC(40...60HZ)/DC
OPERATION UC 220...240V AUXIL. CONTACTS
2NO+2NC 3-POLE, SIZE S6 BAR CONNECTIONS
CONVENT. OPERATING MECHANISM SCREW
TERMINAL

product brand name		SIRIUS
Product designation		power contactor

General technical data:

Insulation voltage		
• Rated value	V	1 000
Degree of pollution		3
Surge voltage resistance Rated value	kV	8
Mechanical service life (switching cycles)		
• of the contactor typical		10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical		5 000 000
• of the contactor with added auxiliary switch block typical		10 000 000
Thermal short-time current restricted to 10 s	A	1 480
Protection class IP		
• on the front		IP00
• of the terminal		IP00
Equipment marking		
• acc. to DIN EN 61346-2		Q
• acc. to DIN EN 81346-2		Q

Main circuit:

Number of poles for main current circuit		3
Number of NC contacts for main contacts		0
Number of NO contacts for main contacts		3
Operating current		

• at AC-1 — at 400 V at ambient temperature 40 °C Rated value — up to 690 V at ambient temperature 40 °C Rated value — up to 690 V at ambient temperature 60 °C Rated value • at AC-3 — at 400 V Rated value — at 690 V Rated value • at AC-4 at 400 V Rated value	A	215
	A	215
	A	185
	A	185
	A	170
	A	160
Operating current with 1 current path		
• at DC-1 — at 24 V Rated value — at 110 V Rated value • at DC-3 at DC-5 — at 24 V Rated value — at 110 V Rated value	A	160
	A	18
	A	160
	A	2.5
Operating current with 2 current paths in series		
• at DC-1 — at 24 V Rated value — at 110 V Rated value • at DC-3 at DC-5 — at 110 V Rated value — at 24 V Rated value	A	160
	A	160
	A	160
	A	160
	A	160
Operating current with 3 current paths in series		
• at DC-1 — at 24 V Rated value — at 110 V Rated value • at DC-3 at DC-5 — at 110 V Rated value — at 24 V Rated value	A	160
	A	160
	A	160
	A	160
	A	160
Operating power		
• at AC-1 at 400 V Rated value	kW	121
• at AC-2 at 400 V Rated value	kW	104
• at AC-4 at 400 V Rated value	W	90 000
Operating power		
• at AC-1 — at 230 V at 60 °C Rated value — at 690 V at 60 °C Rated value — at 690 V Rated value • at AC-3	kW	70
	kW	210
	kW	210

— at 230 V Rated value	kW	61
— at 400 V Rated value	kW	104
— at 500 V Rated value	kW	132
— at 690 V Rated value	kW	167
Operating power for ≥ 200000 operating cycles at AC-4		
• at 400 V Rated value	kW	45
• at 690 V Rated value	kW	65
Operating frequency		
• at AC-3 maximum	1/h	750

Control circuit/ Control:

Type of voltage of the control supply voltage		AC/DC
Control supply voltage with AC		
• at 50 Hz Rated value	V	220 ... 240
• at 60 Hz Rated value	V	220 ... 240
Control supply voltage for DC		
• Rated value	V	220 ... 240
• Rated value	Hz	40
Control supply voltage frequency 2 Rated value	Hz	60
Operating range factor control supply voltage rated value of the magnet coil with AC		
• at 50 Hz		0.8 ... 1.1
• at 60 Hz		0.8 ... 1.1
Operating range factor control supply voltage rated value of the magnet coil for DC		
		0.8 ... 1.1
Design of the surge suppressor		with varistor
Apparent pick-up power of the magnet coil with AC	V·A	300
Apparent holding power of the magnet coil with AC	V·A	5.8
Closing power of the magnet coil for DC	W	360
Holding power of the magnet coil for DC	W	5.2
Inductive power factor		
• with closing power of the coil		0.9
• with the holding power of the coil		0.8

Auxiliary circuit:

Number of NC contacts		
• for auxiliary contacts		
— instantaneous contact		2
Number of NO contacts		
• for auxiliary contacts		
— instantaneous contact		2
Operating current at AC-15		
• at 230 V Rated value	A	6

• at 400 V Rated value	A	3
Operating current		
• at DC-12 at 220 V Rated value	A	1
• at DC-13 at 220 V Rated value	A	0.3
Operating current		
• at DC-12		
— at 60 V Rated value	A	6
— at 110 V Rated value	A	3
• at DC-13		
— at 24 V Rated value	A	10
— at 60 V Rated value	A	2
— at 110 V Rated value	A	1

UL/CSA ratings:

Contact rating of the auxiliary contacts acc. to UL	A600 / Q600
--	-------------

Short-circuit:

Design of the fuse link		
• for short-circuit protection of the main circuit		
— with type of assignment 1 required		fuse gL/gG: 355 A
— with type of assignment 2 required		fuse gL/gG: 315 A
• for short-circuit protection of the auxiliary switch required		fuse gL/gG: 10 A

Installation/ mounting/ dimensions:

Mounting type		screw fixing
• Side-by-side mounting		Yes
Height	mm	172
Width	mm	120
Depth	mm	170
Required spacing		
• for grounded parts		
— at the side	mm	10

Connections/ Terminals:

Type of electrical connection		
• for main current circuit		screw-type terminals
• for auxiliary and control current circuit		screw-type terminals
Type of connectable conductor cross-section		
• for AWG conductors for main contacts		4 ... 250 kcmil
• for auxiliary contacts		
— solid		2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)
— finely stranded with core end processing		2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
• for AWG conductors for auxiliary contacts		2x (20 ... 16), 2x (18 ... 14), 1x 12

Mechanical data:

Size of contactor	S6
-------------------	----

Ambient conditions:

Installation altitude at height above sea level maximum	m	2 000
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-55 ... +80

Certificates/ approvals:

General Product Approval

Functional Safety/Safety of Machinery

Declaration of Conformity



[Type Examination](#)



Test Certificates

Shipping Approval

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

[other](#)



Shipping Approval

other



[Environmental Confirmations](#)

[other](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT10566AP36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT10566AP36/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT10566AP36&lang=en

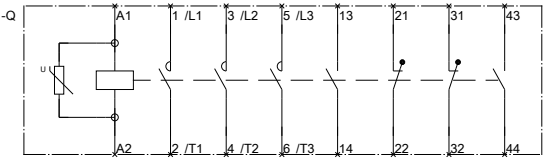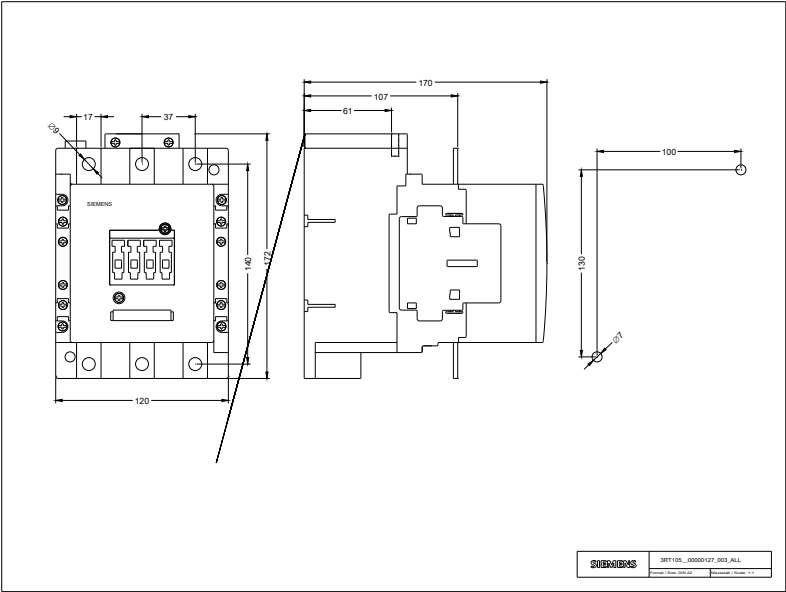

last modified:

11.03.2015

3RT106 - A.6.01_4.IEC.DXF
3RT107 - A.6.01_4.IEC.DXF